


4-Way Standard Cassette

- › Combined with DI CLASSIC outdoor unit
- › 360° air distribution or direct air flow
- › Efficiency up to A++
- › Integrated drain pump (850 mm); prepared for external fresh air supply
 - › Accessories required: remote control + panel

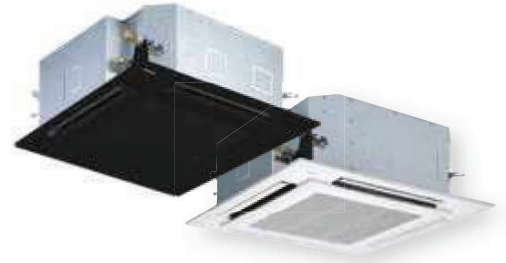

Digital Inverter CLASSIC – 1-phase – 4-way standard cassette

INDOOR UNIT OUTDOOR UNIT			RAV-HM561UTP-E RAV-GV561ATP-E	RAV-HM801UTP-E RAV-GV801ATP-E	RAV-HM1101UTP-E RAV-GV1101ATP-E	RAV-HM1401UTP-E RAV-GV1401ATP-E	RAV-HM1601UTP-E RAV-GV1601ATP-E1
Cooling capacity	kW	❄️	5,00	6,70	9,50	11,50	13,00
Cooling range (min.-max.)	kW	❄️	1,50 - 5,60	1,50 - 8,00	3,00 - 11,20	3,00 - 12,00	3,00 - 14,00
Power consumption (min./nom./max.)	kW	❄️	- /1,60/ -	0,26/2,22/ 2,60	- /3,15/ -	- /4,60/ -	- /5,40/ -
Energy efficiency EER	W/W	❄️	3,13	3,02	3,02	2,50	2,41
Energy efficiency SEER		❄️	6,20	5,81	6,00	5,10	5,90
Energy efficiency class		❄️	A++	A+	A+	n/a	n/a
Outdoor temperature operating range (min.-max.)	°C	❄️	-15 / +46	-15 / +46	-15 / +46	-15 / +46	-15 / +46
Heating capacity	kW	🔥	5,30	7,70	10,00	11,90	13,50
Heating range (min.-max.)	kW	🔥	1,50 - 6,30	1,50 - 9,00	3,00 - 13,00	3,00 - 16,00	3,00 - 18,00
Power consumption (min./nom./max.)	kW	🔥	- /1,40/ -	0,26/2,13/ 3,03	- /3,10/ -	- /3,80/ -	- /3,90/ -
Energy efficiency COP	W/W	🔥	3,79	3,62	3,23	3,13	3,46
Energy efficiency SCOP		🔥	4,20	4,42	4,00	3,90	4,20
Energy efficiency class		🔥	A+	A+	A+	n/a	n/a
Outdoor temperature operating range (min.-max.)	°C	🔥	-15 / +15	-15 / +15	-15 / +15	-15 / +15	-15 / +15
Power supply	V/Ph+N/Hz		220-240/1+N/ 50	220-240/1+N/ 50	220-240/1+N/ 50	220-240/1+N/ 50	220-240/1+N/ 50
Recommended fusing	A		16	16	20	25	32

LIGHT BUSINESS / RAV

INDOOR UNIT		RAV-HM561UTP-E	RAV-HM801UTP-E	RAV-HM1101UTP-E	RAV-HM1401UTP-E	RAV-HM1601UTP-E
Airflow	m³/h	780/870/ 1050	810/960/ 1230	1170/1440/ 2010	1230/1440/ 2100	1260/1500/ 2130
Sound pressure level (low/med/high)	dB(A)	❄️ 28/29/32	❄️ 28/31/35	❄️ 33/38/43	❄️ 34/38/44	❄️ 36/40/45
Sound pressure level (low/med/high)	dB(A)	🔥 28/29/32	🔥 28/31/35	🔥 33/38/43	🔥 34/38/44	🔥 36/40/45
Dimensions (HxWxD)	mm	256 x 840 x 840	256 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
Weight	kg	20	20	24	24	24
Panel dimensions (HxWxD)	mm	30 x 950 x 950	30 x 950 x 950	30 x 950 x 950	30 x 950 x 950	30 x 950 x 950
Panel weight	kg	4,2	4,2	4,2	4,2	4,2

OUTDOOR UNIT		RAV-GV561ATP-E	RAV-GV801ATP-E	RAV-GV1101ATP-E	RAV-GV1401ATP-E	RAV-GV1601ATP-E1
Sound pressure level (low/med/high)	dB(A)	❄️ 46	❄️ 48	❄️ 53	❄️ 53	❄️ 57
Sound pressure level (low/med/high)	dB(A)	🔥 48	🔥 51	🔥 55	🔥 60	🔥 59
Suction gas pipe diameter	mm (inch)	12,7 (1/2)	15,9 (5/8)	15,9 (5/8)	15,9 (5/8)	15,9 (5/8)
Liquid pipe diameter	mm (inch)	6,4 (1/4)	9,5 (3/8)	9,5 (3/8)	9,5 (3/8)	9,5 (3/8)
Pipe length (min.)	m	5	5	5	5	5
Pipe length (max.)	m	30	30	30	30	30
Height difference (max.)	m	20	20	30	30	30
Compressor type		Twin-Rotary	Twin-Rotary	Twin-Rotary	Twin-Rotary	Twin-Rotary
Refrigerant		R32	R32	R32	R32	R32
Refrigerant charge	kg	0,90	1,40	1,70	1,90	2,20
Dimensions (HxWxD)	mm	550 x 780 x 290	550 x 780 x 290	630 x 800 x 300	710 x 900 x 320	890 x 900 x 320
Weight	kg	36	39	45	57	64