

MSZ-RW SERIES

R32 R410A
Single / MXZ, PUMY PUMY

As a flagship model, RW series realises further outstanding heating performances under extremely cold outdoor temperature even with high energy efficiency. Moreover, excellent air purifying functions and many other smart features deliver a great comfort to you.



MSZ-RW25/35/50VG




Heating Performance

Excellent heating performance of RW series delivers the prime warmth into your room. RW series' powerful compressor realises remarkable maximum heating capacity in low ambient temperature with a high energy efficiency. Also, RW series performs 100% rated capacity even at -25°C, and the operation is guaranteed down to -30°C for all classes (25/35/50).


High Energy Efficiency

RW25	A+++	SCOP 5.2
RW35	A+++	SCOP 5.1
RW50	A++	SCOP 4.6

Improved Heating Capacity

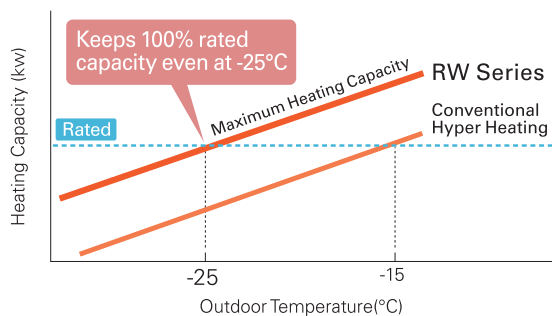


Wider Heating Operation Range

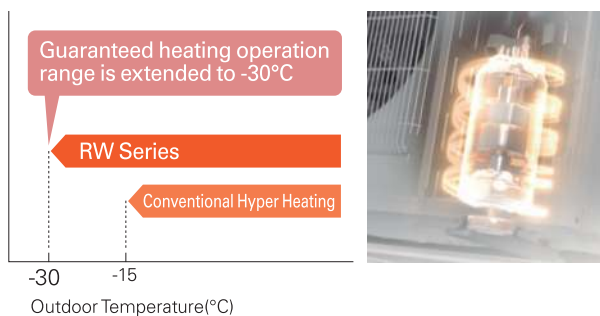

Longer Continuous Heating Operation


RW series with a high frost-detecting technology, made it possible to provide maximum continuous heating operation as long as 150 minutes with less frequent defrosting operations, maintaining a comfortable indoor environment in a long term.

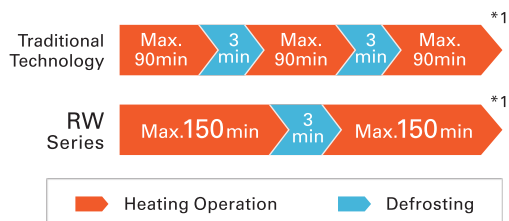


*1 The time for heating and defrosting operation depends on the environmental conditions.

Tested in Sweden and Norway

We have conducted field tests in several cold sites and received high user satisfactions with sufficient air volume and remarkable heating performance of RW series. As the test result shows, we confirmed that RW series provides stable indoor comfortability even in extremely low ambient temperature.



Test result in Norway

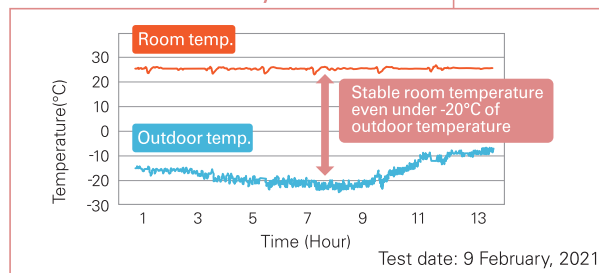

3D i-see Sensor

3D i-see sensor with the sophisticated hemispherical design measures the temperature of the room with an infrared sensor and detects the position of people, which allows you to choose your preferable airflow such as indirect and direct airflow.




Circulator Mode

In heating mode, after reaching the setting temperature, indoor unit automatically starts FAN mode to circulate the air and eliminate temperature unevenness in your room.



Plasma Quad Plus

Plasma Quad Plus is a plasma-based filtering system which contributes to a better air quality in your room. Plasma Quad Plus applies a voltage of approximately 6,000 volts to the electrode to generate plasma, effectively removing various kinds of airborne particles such as viruses, bacteria, mold, allergen, dust, and PM2.5.

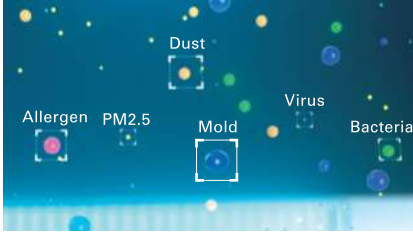

*Images are for illustration purposes.

Virus (Airborne)

99% inhibited*1


*1 Tested Organization: vrc. Center, SMC Test Report No: 28-002 Test Method: JEM1467 Test result: Neutralised 99% of Influenza A virus in 72 minutes in a 25m³ test space.

*2 Tested Organization: Japan Textile Products Quality and Technology Center, Test Report No: 20KB070569, Tested Materials: SARS-CoV-2, Test Method: Original (The test was conducted on the Plasma Quad device alone, not designed to evaluate product performance.) Test Result: Inhibited 99.8% in 360 minutes. The result without the effect of natural attenuation is 96.3%.

We have confirmed Plasma Quad Plus inhibits 99.8% of adhered COVID-19. *2


Quick Air Purifying Set

If you press "PURIFIER" button when the unit is turned off, Plasma Quad Plus starts to operate with a fan mode and purifies the air in your room.

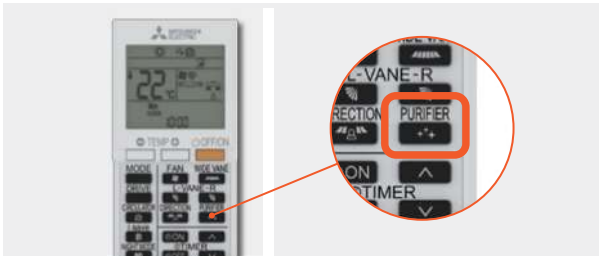

Deodorising Filter




The catalyst in Deodorising Filter denatures the odorous components and destroys them from the source of the odour, quickly delivering fresh air to your room.

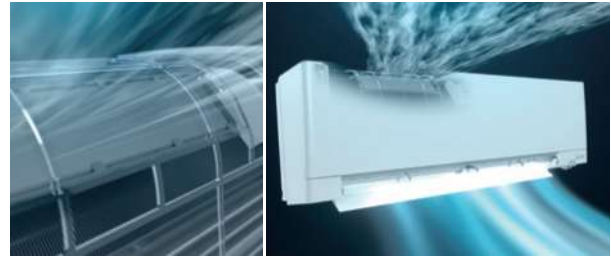

Dual Barrier Coating

SIAA *1
Anti Fungus
JP0512075X0001C
(Fan, Air duct)


Mitsubishi Electric's Dual Barrier Coating prevents dust and greasy dirt from accumulating on the inner surface of the indoor unit; keeping your air conditioner clean. Two barrier coating prevents hydrophilic dirt penetration, and "hydrophilic particles" prevent hydrophobic dirt from getting into the air conditioner.

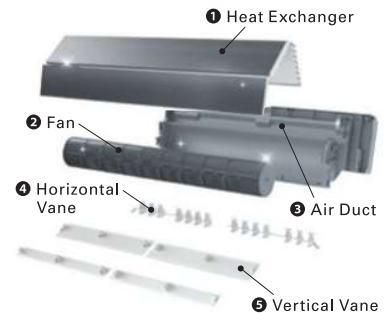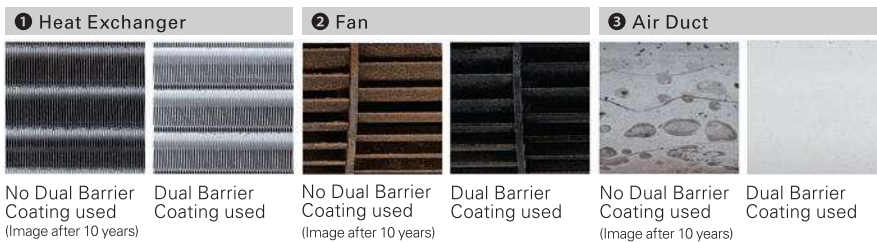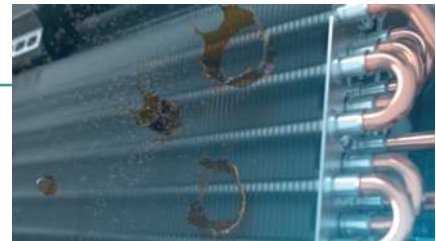

Dual Barrier Material

SIAA *2
Anti Fungus
JP0512075X0001C
(Horizontal Vane, Vertical Vane)

Dual Barrier Material performs the same antifouling effect as Dual Barrier Coating, and it is kneaded into horizontal vane and vertical vane material which are hard to apply coating to. Combined with Dual Barrier Coating, the whole air passage of indoor unit is kept clean all year round.

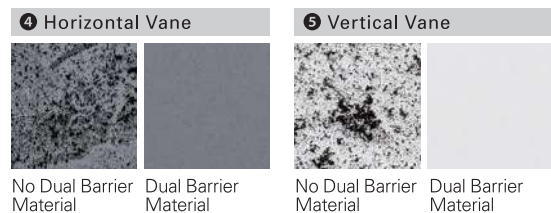

*Comparison of stains after 10 years of use (based on internal research)


*1 *2 Verified by SIAA test method (JIS Z 2911) with No. JP0501014A0002O on SIAA antifungal agent positive list. Antifungal effect depends on the working environment. Fungicides comply with the SIAA safety criteria. What is SIAA? https://www.kohkin.net/en_index.html

Drive Mode Selector

Drive Mode Selector allows you to select a preferred control setting according to your residential environment from three modes, Wide Room mode, Quiet mode, and Eco mode.


Wide Room Mode

Provides a better air distribution in your room and raises the comfort level.

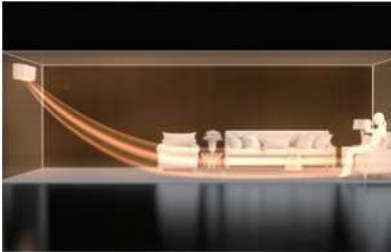

Eco Mode

Suppresses a sharp increase in energy consumption by a gradual start-up operation.

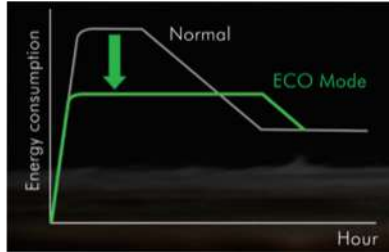

Quiet Mode

Lowers operation noise level, creating a quieter and peaceful environment.




Built-in Wi-Fi & App Control

Indoor unit is equipped with Wi-Fi interface which allows you to access MELCloud app, providing you with a flexible control of air conditioner on your smartphone, tablets, and PC.



Easy Wi-Fi Set Up

You can easily connect Wi-Fi adaptor in the indoor unit and your local router with just a simple operation of remote controller.

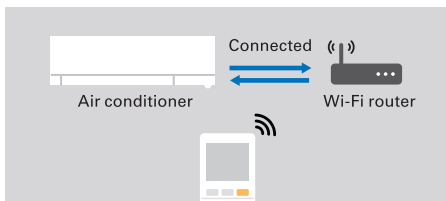

Remote Controller with Backlight

The remote controller screen is equipped with LED backlight. The luminous screen allows you to check the setting easily even in the dark.



Back Plate with a Hole

With a hole as default in the center of the back plate, the piping can be easily taken out from the back. The edge of the hole is reinforced to ensure the strength.



The edge of the hole is reinforced to ensure the strength.


Spacer

A part of the packing material can be used as a spacer to lift indoor unit during the left-side piping work, which makes stable installation work possible.



Bottom Removable Structure

The corner box and the bottom panel are individually removable, and it makes easy to insert tools even in the case of left-side piping.

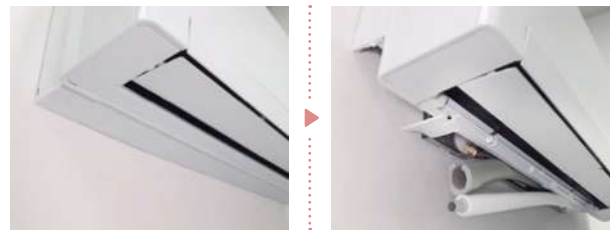

Easy Plugging/Unplugging of Drain Hose

One-touch structure with screw-free claw fixing. Easy to plug and unplug the drain hose when changing on the left and right.



MSZ-RW SERIES



Indoor Unit / Remote Controller

<White>



MSZ-RW25/35/50VG


Outdoor Unit



MUZ-RW25/35VGHZ



MUZ-RW50VGHZ



Type				Inverter Heat Pump				
Indoor Unit		MSZ-RW25VG		MSZ-RW35VG				
Outdoor Unit		MUZ-RW25VGHZ		MUZ-RW50VGHZ				
Refrigerant		R32 ^{(*)1}						
Power Supply		Outdoor Power supply						
Source		230/Single/50						
Outdoor (V/Phase/Hz)								
Cooling	Design Load		kW		2.5	3.5	5.0	
	Annual Electricity Consumption ^{(*)2}		kWh/a		78	130	230	
	SEER ^{(*)4}				11.2	9.4	7.6	
	Energy Efficiency Class				A+++	A+++	A++	
	Capacity	Rated	kW		2.5	3.5	5.0	
		Min - Max	kW		0.9 - 3.5	1.0 - 4.0	1.4 - 5.8	
Total Input		Rated		kW		0.435	0.770	1.380
Heating (Average Season) ^{(*)5}	Design Load		kW		3.2	4.0	6.0	
	Declared Capacity	at reference design temperature	kW		3.2 (-10°C)	4.0 (-10°C)	6.0 (-10°C)	
		at bivalent temperature	kW		3.2 (-10°C)	4.0 (-10°C)	6.0 (-10°C)	
		at operation limit temperature	kW		2.6 (-25°C)	2.6 (-25°C)	4.0 (-25°C)	
	Back Up Heating Capacity		kW		0.0	0.0	0.0	
	Annual Electricity Consumption ^{(*)2}		kWh/a		856	1097	1800	
	SCOP ^{(*)4}				5.2	5.1	4.6	
	Energy Efficiency Class				A+++	A+++	A++	
	Capacity	Rated	kW		3.2	4.0	6.0	
Min - Max		kW		0.8 - 6.3	1.1 - 7.0	1.8 - 8.7		
Total Input		Rated		kW		0.580	0.810	1.450
Operating Current (max)		A		9.8	11.2	15.2		
Indoor Unit	Input		Rated	kW		0.021	0.022	0.041
	Operating Current (max)		A		0.21	0.22	0.37	
	Dimensions		H x W x D	mm		305 - 998 - 247	305 - 998 - 247	305 - 998 - 247
	Weight		kg		14.5	14.5	14.5	
	Air Volume (SLo-Lo-Mid-Hi-SHi ^{(*)3})	Cooling	m ³ /min		5.1 - 6.5 - 9.0 - 11.5 - 13.7	5.1 - 6.9 - 9.0 - 11.5 - 14.1	7.8 - 9.5 - 11.1 - 13.1 - 16.2	
		Heating	m ³ /min		5.1 - 7.8 - 9.5 - 11.7 - 14.1	5.1 - 7.8 - 9.5 - 11.7 - 14.5	7.8 - 10.7 - 12.5 - 14.7 - 18.2	
	Sound Level (SPL) (SLo-Lo-Mid-Hi-SHi ^{(*)3})	Cooling	dB(A)		19 - 23 - 29 - 36 - 42	19 - 24 - 29 - 36 - 43	26 - 30 - 34 - 39 - 45	
		Heating	dB(A)		19 - 25 - 30 - 36 - 41	19 - 25 - 30 - 36 - 42	25 - 32 - 37 - 41 - 46	
	Sound Level (PWL)		dB(A)		58	59	59	
	Outdoor Unit	Dimensions		H x W x D	mm		714 - 800 - 285	714 - 800 - 285
Weight		kg		39.5	40	54		
Air Volume		Cooling	m ³ /min		35.1	37.8	49.3	
		Heating	m ³ /min		37.8	37.8	55.6	
Sound Level (SPL)		Cooling	dB(A)		46	49	51	
		Heating	dB(A)		49	50	54	
Sound Level (PWL)		Cooling		dB(A)		60	61	64
Operating Current (max)		A		9.6	11.0	14.8		
Breaker Size		A		10	12	16		
Ext. Piping	Diameter		Liquid / Gas	mm		6.35/9.52	6.35/9.52	6.35/9.52
	Max. Length		Out-In		m		20	30
	Max. Height		Out-In		m		12	15
Guaranteed Operating Range (Outdoor)		Cooling		°C		-10 ~ +46	-10 ~ +46	-10 ~ +46
		Heating		°C		-30 ~ +24	-30 ~ +24	-30 ~ +24

^{(*)1} Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

^{(*)2} Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

^{(*)3} SHi: Super High

^{(*)4} SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on 'Average Season'.

^{(*)5} Please see page 53-55 for heating (warmer season) specifications.