

# MSZ-L SERIES

**R32**  
Single / MXZ, PUMY

**R410A**  
PUMY

MSZ-LN18/25/35/50/60VG2



**GOOD DESIGN AWARD 2016**  
**BEST 100**



Developed to complement modern interior room décor, the LN Series is available in four colours specially chosen to blend in naturally wherever installed. Not only the sophisticated design, but also the optimum energy efficiency and operational comfort add even more value to this series.

## Luminous and Luxurious Design

Natural White, Pearl White, Ruby Red, and Onyx Black. LN Series indoor units are available in four colours to match various lifestyles. The appearance of the indoor unit differs depending on the lighting in the room, attracting the attention of everyone that enters the room.




Master craftsmanship painting technology has resulted in a refined design, giving the finish deep colour and a premium quality feel.



Pearl White blends in with any interior.



Ruby Red gives an accent to the room, affording timeless elegance to sophisticated interiors.

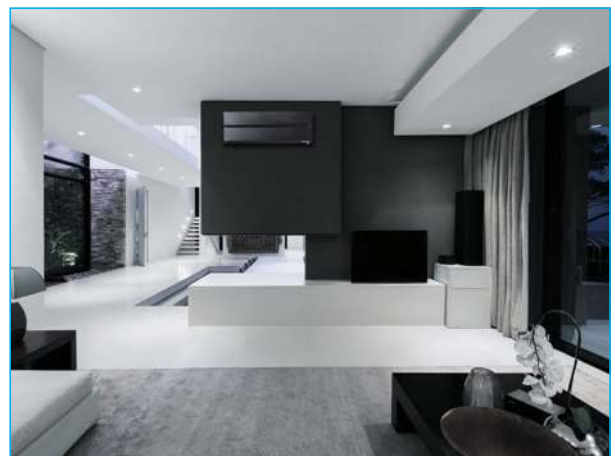

Onyx Black matches darker interiors, creating a comfortable environment.

## LED Backlight Remote Controller

Not only the indoor units, but the wireless remote controllers come in four colours as well. Each remote controller matches the indoor unit. Even the textures are the same.


The setting can be easily checked in the dark thanks to LED backlight.



## High Energy Efficiency




Optimum cooling/heating performance is another feature for the LN series. Models from capacities 25 to 50 have achieved the "Rank A+++" for SEER, and models for capacities 25 and 35 have achieved the "Rank A+++" for SCOP as well.

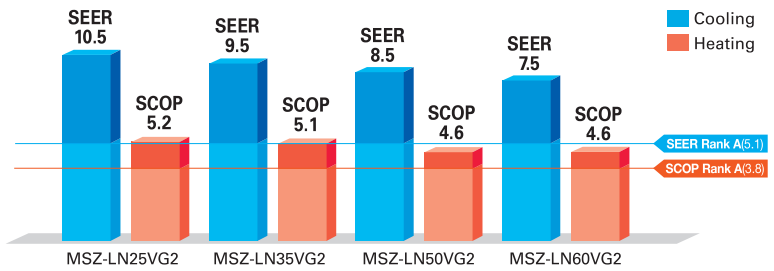

## 3D i-see Sensor

The LN Series is equipped with 3D i-see Sensor, an infrared-ray sensor that measures the temperature at distant positions. While moving to the left and right, eight vertically arranged sensor elements analyze the room temperature in three dimensions. This detailed analysis makes it possible to judge where people are in the room, thus allowing creation of features such as "Indirect airflow," to avoid airflow hitting people directly, and "direct airflow" to deliver airflow to where people are.

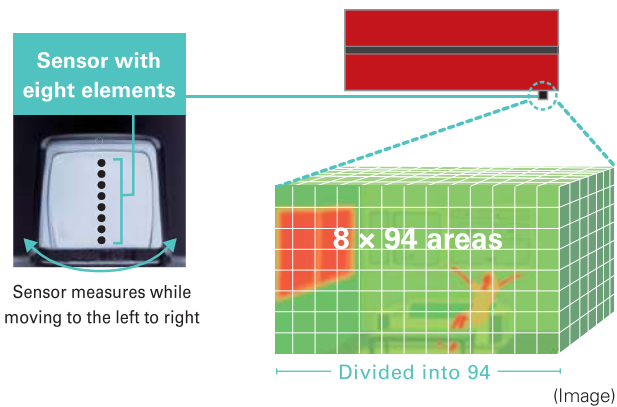


### Indirect Airflow

The indirect airflow setting can be used when the flow of air feels too strong or direct. For example, it can be used during cooling to avert airflow and prevent body temperature from becoming excessively cooled.




### Direct Airflow

This setting can be used to directly target airflow at people such as for immediate comfort when coming indoors on a hot (cold) day.




### Even Airflow \*LN Series only

Normal swing mode



Even airflow mode




The airflow is distributed equally throughout the room, even to spaces where there is no human movement.

The 3D i-see sensor memorizes human movement and furniture positions, and efficiently distributes airflow.

### No occupancy energy-saving mode


The sensors detect whether there are people in the room. When no-one is in the room, the unit automatically switches to energy-saving mode.

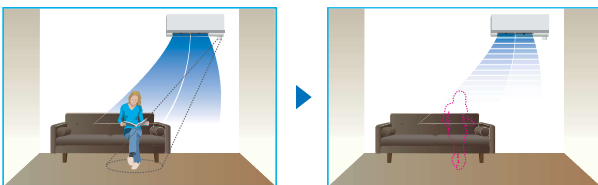

The "3D i-see Sensor" detects people's absence and the power consumption is automatically reduced approximately 10% after 10 minutes and 20% after 60 minutes.

### No occupancy Auto-OFF mode \*LN Series only

The sensors detect whether or not there are people in the room. When there is no one in the room, the unit turns off automatically.

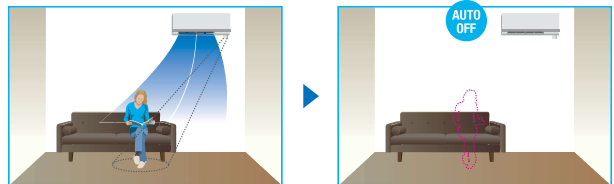


## Circulator Operation


(MSZ-LN18/25/35/50/60VG-SC Scandinavian model)

In case the indoor temperature reaches the setting temperature, the outdoor unit stops and the indoor unit starts FAN operation to circulate the indoor air.

The outdoor unit starts operation automatically when the indoor temperature drops below the setting temperature.



If the heating operation is continued, the warm air is formed around ceiling.




This operating can help to circulate and refresh warm air.

# Plasma Quad Plus

Plasma Quad Plus is a plasma-based filter system that effectively removes six kinds of air pollutants. Plasma Quad Plus captures mold and allergens more effectively than Plasma Quad. It can also capture PM2.5 and particles smaller than 2.5µm, creating healthy living spaces for all.

## Bacteria



Test results have confirmed that Plasma Quad Plus neutralizes 99% of bacteria in 162 minutes in a 25m<sup>3</sup> test space.

<Test No.> KRCS-Bio. Test Report No. 2016-0118

## Viruses



Test results have confirmed that Plasma Quad Plus neutralizes 99% of virus particles in 72 minutes in a 25m<sup>3</sup> test space.

<Test No.> vrc.center, SMC No. 28-002

## Molds



Test results have confirmed that Plasma Quad Plus neutralizes 99% of mold in 135 minutes in a 25m<sup>3</sup> test space.

<Test No.> Japan Food Research Laboratories Test Report No. 16069353001-0201

## Allergens



In a test, air containing cat fur and pollen was passed through the air cleaning device at the low airflow setting. Before and after measurements confirm that Plasma Quad Plus neutralizes 98% of cat fur and pollen.

<Test No.> ITEA Report No. T1606028

## PM2.5



Test results have confirmed that Plasma Quad Plus removes 99% of PM2.5 in 145 minutes in a 28m<sup>3</sup> test space.

<In-company investigation>

## Dust




Test results have confirmed that Plasma Quad Plus removes 99.7% of dust and mites.

<Test No.> ITEA Report No. T1606028


Model	Name	Method	Bacteria	Viruses	Molds	Allergens	Dust	PM2.5*
FH Series	Plasma Quad	One-Stage Plasma	A	A	B	B	C	
LN Series	Plasma Quad Plus	Two-Stage Plasma	A	A	A	A	A	A

A: Highly effective  
B: Effective  
C: Partially effective


\*PM2.5:  
Particles smaller than 2.5µm

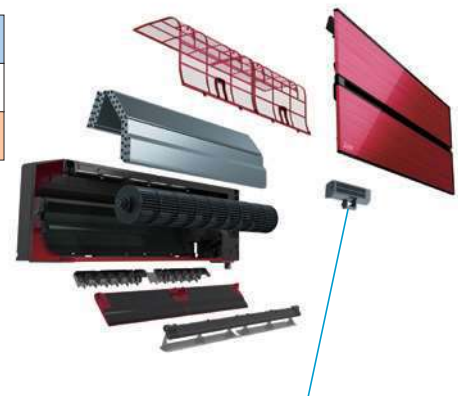

## Image of Plasma Quad Plus

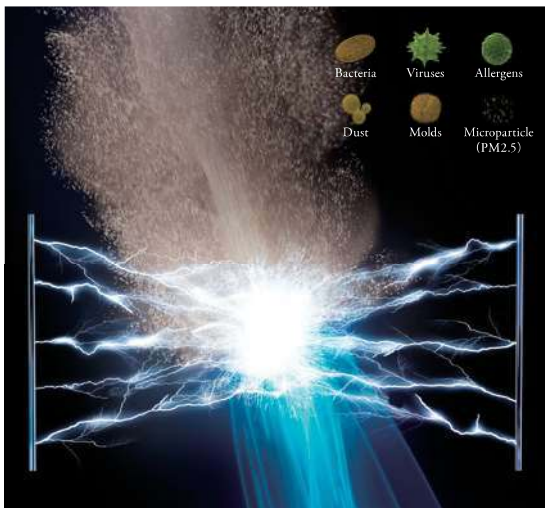

## Principle of Plasma Quad Plus

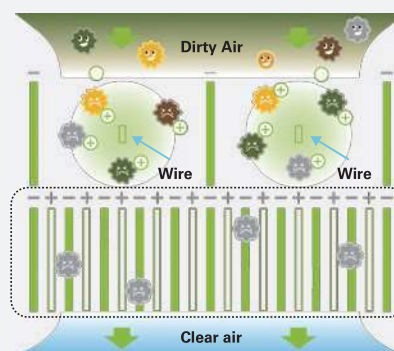

Dust, PM2.5  
Viruses Bacteria  
Mold Allergens

### 1st stage

- Make plasma.
- Break mold and allergens. Inhibit viruses.
- Dust and PM2.5 given an electrical charge (+).


### 2nd stage

- Make a strong electrical field.
- The charged dust and PM2.5 (+) are absorbed in the strong electrical field (-).




# Dual Barrier Coating

A two-barrier coating prevents dust and greasy dirt from getting into the air conditioner.

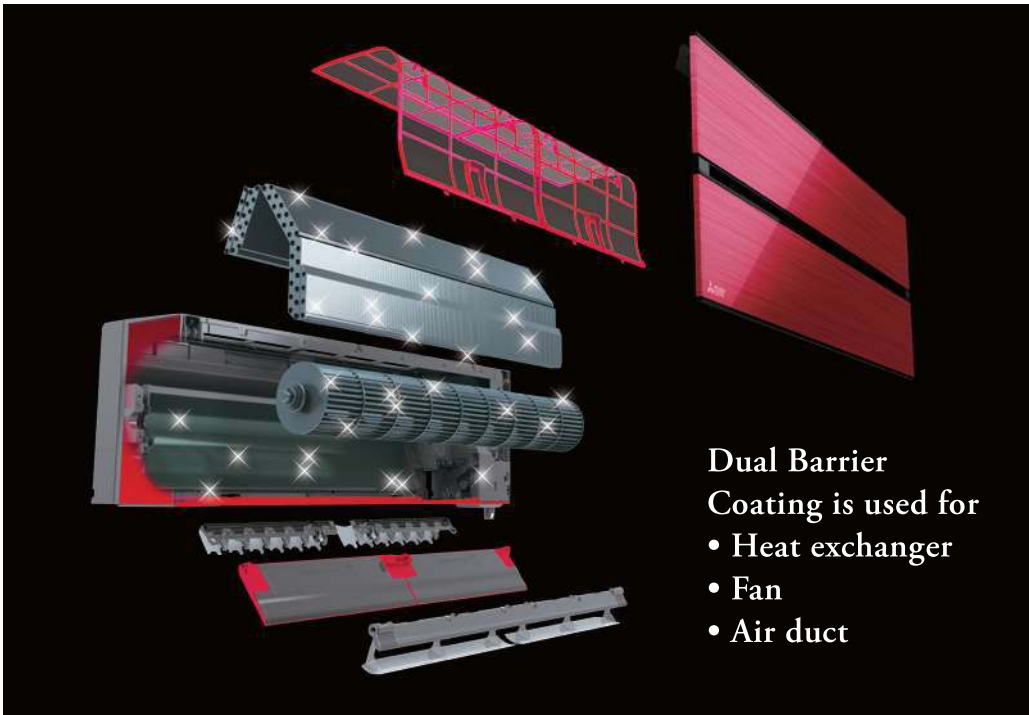


## State-of-the-art coating technology


Dirt is generally classified into two groups: hydrophilic dirt such as fiber dust and sand dust, and hydrophobic dirt such as oil and cigarette smoke. Mitsubishi Electric's dual barrier coating works as a two-barrier coating that prevent hydrophilic dirt penetration and "hydrophilic particles" that prevent hydrophobic dirt from getting into the air conditioner. This dual coating on the inner surface keeps the air conditioner clean year-round.

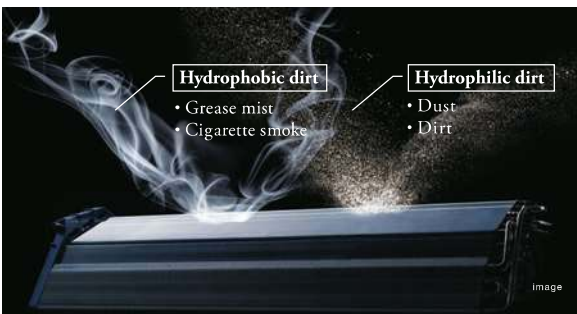

### Comparison of dirt on heat exchanger, fan and air duct (in-house comparison)

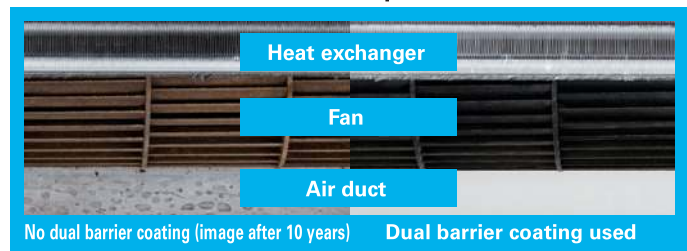

### The inside of the indoor unit gets dirty after many years of usage.

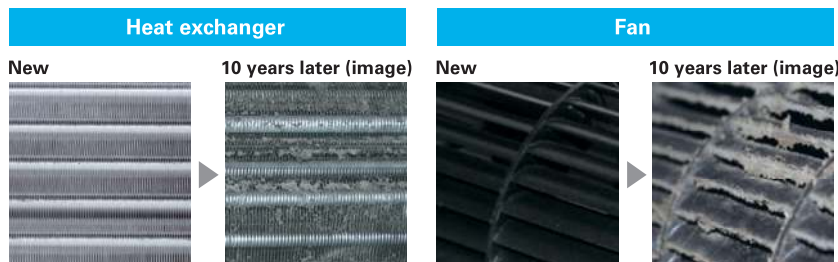

### Consequences when the inside of the indoor unit is left dirty

- Deterioration in energy efficiency
- Musty smell from the unit

\*1 Verified by SIAA test method (JIS Z 2911) with No. JP0501014A0002O on SIAA antifungal agent positive list. Antifungal effect depends on the working environment. Fungicides comply with the SIAA safety criteria.  
What is SIAA? [https://www.kohkin.net/en\\_index/en\\_siaa.html](https://www.kohkin.net/en_index/en_siaa.html)

## Double Flap

The vanes create various airflows to make each person in the room comfortable. Not only the horizontal vanes, but also the vertical vanes move independently, eliminating hot spots or cold spots throughout the room.




## Night Mode

When Night Mode is activated using the wireless remote controller, air conditioner operation will switch to the following settings.

- The brightness of the operation indicator lamp will become dimmer.
- The beeping sound will be disabled.
- The outdoor operating noise will drop to 3dB lower than the rated operating noise specification.


\*The cooling/heating capacity may drop.

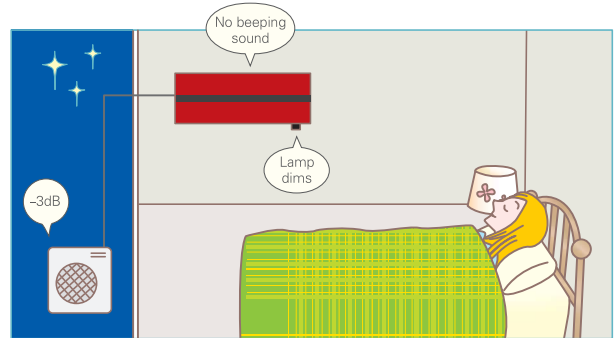

## 10°C Heating


During heating operation, the temperature can be set in 1°C increments down to 10°C.

This function can also be used with the Weekly Timer setting.

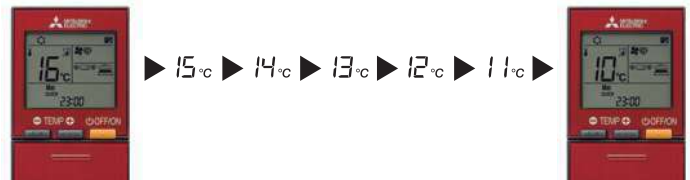

## Quiet Operation


The indoor unit noise level is as low as 19dB for LN25/35 models, offering a peaceful inside environment.

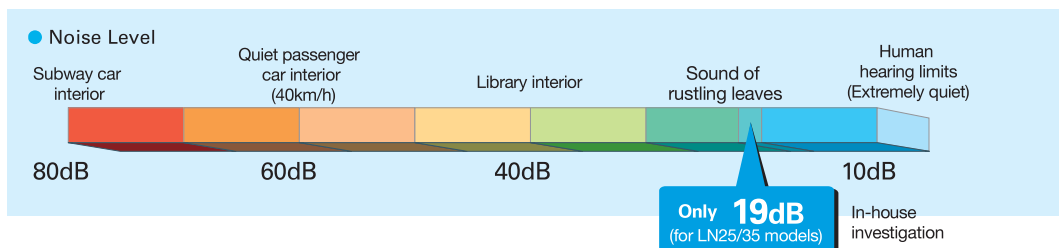

## Built-in Wi-Fi Interface

The indoor unit is equipped with a Wi-Fi Interface inside an exclusive pocket in the unit.

This eliminates the need to install a Wi-Fi interface, and also contributes to the beautiful appearance since the interface is hidden.

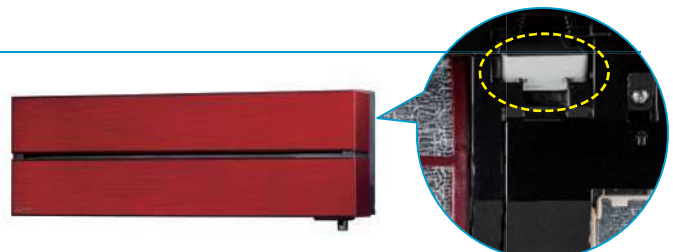

# MSZ-L SERIES



## Indoor Unit / Remote Controller



### <Pearl White>



MSZ-LN18/25/35/50/60VG2V

### <Ruby Red>



MSZ-LN18/25/35/50/60VG2R

### <Natural White>



MSZ-LN18/25/35/50/60VG2W

### <Onyx Black>



MSZ-LN18/25/35/50/60VG2B

## Outdoor Unit




MUZ-LN25/35VG2



MUZ-LN50VG2



MUZ-LN60VG2

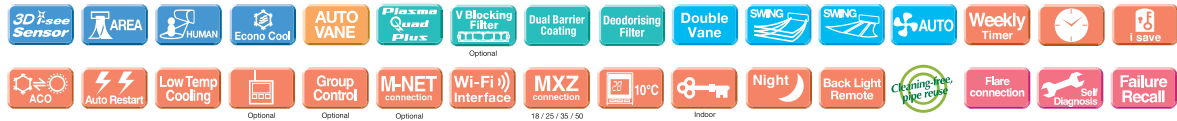

Type			Inverter Heat Pump					
Indoor Unit	MSZ-LN18VG2		MSZ-LN25VG2	MSZ-LN35VG2	MSZ-LN50VG2	MSZ-LN60VG2		
Outdoor Unit	for MXZ connection		MUZ-LN25VG2	MUZ-LN35VG2	MUZ-LN50VG2	MUZ-LN60VG2		
Refrigerant			Single: R32 <sup>(1)</sup> / Multi: R410A or R32 <sup>(1)</sup>					
Power Source			Outdoor Power Supply					
Supply	Outdoor (V / Phase / Hz)		230 / Single / 50					
Cooling	Design load	kW	–	2.5	3.5	5.0	6.1	
	Annual electricity consumption <sup>(2)</sup>	kWh/a	–	83	129	205	285	
	SEER <sup>(4)</sup>		–	10.5	9.5	8.5	7.5	
	Capacity	Energy efficiency class		–	A+++	A+++	A+++	A++
		Rated	kW	–	2.5	3.5	5.0	6.1
Heating (Average Season) <sup>(5)</sup>	Declared Capacity	kW	–	1.0 - 3.5	0.8 - 4.0	1.0 - 6.0	1.4 - 6.9	
	Back up heating capacity	kW	–	0.485	0.820	1.380	1.790	
	Design load	kW	–	3.0 (-10°C)	3.6 (-10°C)	4.5 (-10°C)	6.0 (-10°C)	
	Capacity	at reference design temperature	kW	–	3.0 (-10°C)	3.6 (-10°C)	4.5 (-10°C)	6.0 (-10°C)
		at bivalent temperature	kW	–	3.0 (-10°C)	3.6 (-10°C)	4.5 (-10°C)	6.0 (-10°C)
Annual electricity consumption <sup>(2)</sup>	kWh/a	–	2.5 (-15°C)	3.2 (-15°C)	4.2 (-15°C)	6.0 (-15°C)		
Indoor Unit	SCOP <sup>(4)</sup>		–	807	987	1369	1816	
	Capacity	Energy efficiency class		–	A+++	A+++	A++	A++
		Rated	kW	–	3.2	4.0	6.0	6.8
	Operating Current (Max)	A	–	0.7 - 5.4	0.9 - 6.3	1.0 - 8.2	1.8 - 9.3	
	Input	kW	–	0.600	0.820	1.480	1.810	
Outdoor Unit	Operating Current (Max)	A	–	7.1	9.9	13.9	15.2	
	Input	kW	–	0.027	0.027	0.034	0.040	
	Operating Current (Max)	A	–	0.3	0.3	0.4	0.4	
	Dimensions	H*W*D	mm	307-890-233	307-890-233	307-890-233	307-890-233	
	Weight	kg		14.5 (W) 15.5 (V, R, B)	14.5 (W) 15.5 (V, R, B)	14.5 (W) 15.5 (V, R, B)	15 (W) 16 (V, R, B)	
Ext. Piping	Air Volume (SLo-Lo-Mid-Hi-SHi) <sup>(3)</sup>	m <sup>3</sup> /min	4.7 - 5.9 - 7.1 - 9.2 - 12.4	4.7 - 5.9 - 7.1 - 9.2 - 12.4	4.7 - 5.9 - 7.1 - 9.2 - 13.0	5.7 - 7.6 - 8.8 - 10.6 - 13.9	7.1 - 8.8 - 10.6 - 12.7 - 15.7	
	Sound Level (SPL) (SLo-Lo-Mid-Hi-SHi) <sup>(3)</sup>	dB(A)	19 - 23 - 29 - 36 - 42	19 - 23 - 29 - 36 - 42	19 - 24 - 29 - 36 - 43	27 - 31 - 35 - 39 - 46	29 - 37 - 41 - 45 - 49	
	Sound Level (PWL)	dB(A)	19 - 24 - 29 - 38 - 45	19 - 24 - 29 - 38 - 45	19 - 24 - 29 - 38 - 45	25 - 29 - 34 - 39 - 47	29 - 37 - 41 - 45 - 49	
	Operating Current (Max)	A	–	58	58	59	60	
	Breaker Size	A	–	58	58	59	60	
Guaranteed Operating Range (Outdoor)	Dimensions	H*W*D	mm	550-800-285	550-800-285	714-800-285	880-840-330	
	Weight	kg	–	33	34	40	53	
	Air Volume	m <sup>3</sup> /min	–	34.3	34.3	40.0	48.8	
	Sound Level (SPL)	dB(A)	–	32.7	32.7	40.5	55.0	
	Sound Level (PWL)	dB(A)	–	46	49	51	55	
Guaranteed Operating Range (Outdoor)	Operating Current (Max)	A	–	49	50	54	55	
	Sound Level (PWL)	dB(A)	–	60	61	64	65	
	Breaker Size	A	–	6.8	9.6	13.5	14.8	
Diameter	Liquid/Gas	mm	–	10	10	16	16	
	Max.Length	m	–	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.7	
	Max.Height	m	–	20	20	30	30	
Guaranteed Operating Range (Outdoor)	Cooling	°C	–	12	12	12	15	
	Heating	°C	–	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	
Guaranteed Operating Range (Outdoor)	Cooling	°C	–	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	
	Heating	°C	–	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	

(1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO<sub>2</sub> over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(3) SHi: Super High

(4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(5) Please see page 57-59 for heating (warmer season) specifications.